


FAT-10B-2

10 Ports Fiber Access Terminal Box

Application

- Applicable for the FTTH fast deploy project and provide mechanical protection for fiber management system that includes the functions of splicing, patching and passive component integration.
- Rated to IP68, suitable for outdoor wall or pole mount application.

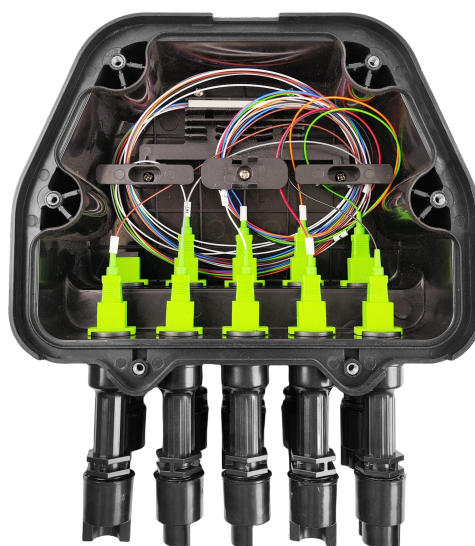


Specifications

Part No.	FAT-10B-2
Material of Housing	PC/ABS
Color	Black
Dimensions	210x210x85mm
Cable Entry Ports	1 Hardened Adapter (Red)
Terminal capacity	9 Hardened Adapter (Black)
One Branch (Blind) Ports	Uneven
Suitable Splitter	Micro splitter 1:8, uneven splitter 1:9
Splicing Capacity (Max)	2/4 FO
Number of Adaptor (Max)	10 SC
IP Rating	IP68
Mount method	Wall or Pole Mounted

Features & Benefits



Accessories

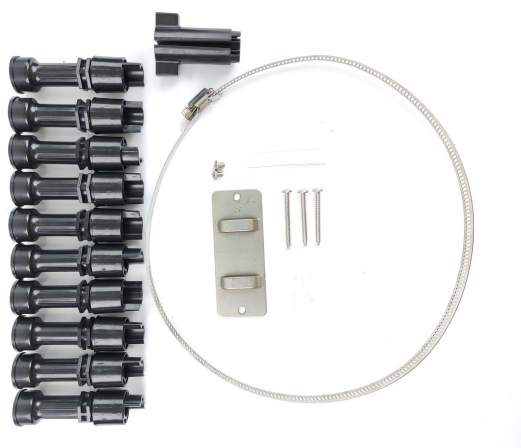

Packing List

Part No.	Carton Size	PCS/CTN	G.W.
FAT-10B-2	56x46x60CM	20	22KG