

FDB-4C

FTTx Outdoor Distribution Box

Applications


- Applicable for the FTTH project and provide mechanical protection for fiber management system that includes the functions of splicing, patching and passive component integration.
- Rated to IP65, suitable for indoor or outdoor application.




Specifications

Part No.	FDB-4C
Dimension(mm)	186*135 *40
Cable port with PG gland	2 x PG13.5
Blind port	1 blind port suitable for PG13.5
Suitable cable diameter	6-12 mm
Suitable drop cable	3-4mm max.4pcs
Splice capacity	4/8 FO
Max. number of adapters	4 SC or 4 LC Duplex
Splitter type	Micro PLC splitter 1x4, 1x8

. Cable ports

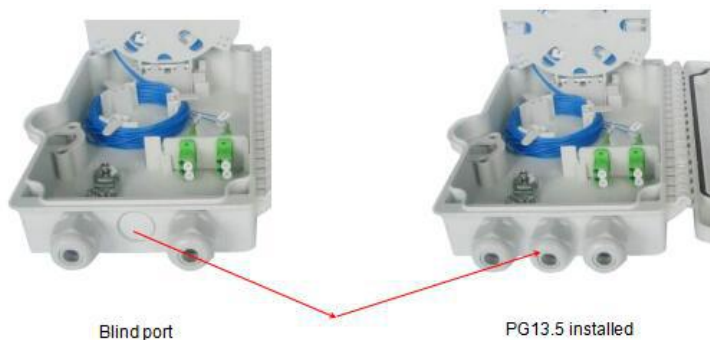


. Suitable 4SC adapters

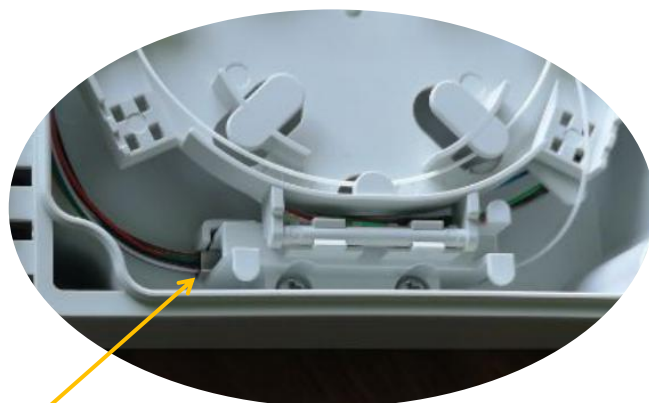

. Micro Splitter installation

Micro PLC splitter installed here.

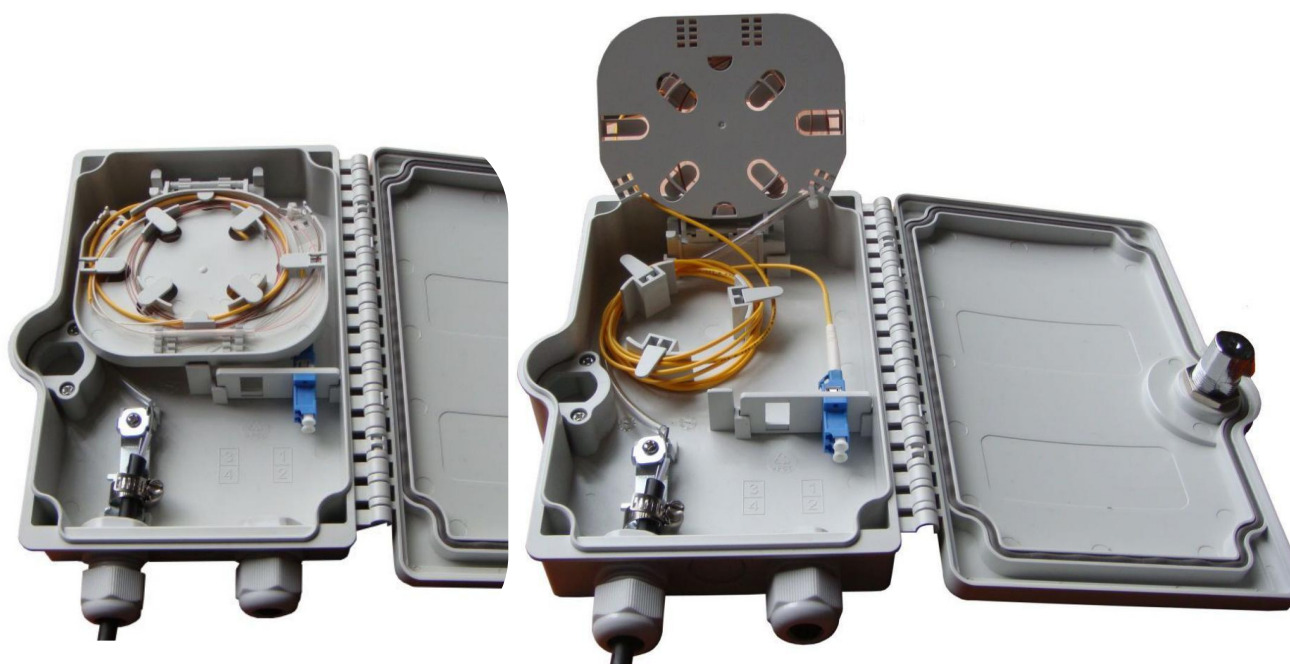

. Accessories

