


GP-T868

1-Core FTTH Wall Outlet

Application

- The GP-T868 Indoor Distribution Terminal Box, as the most compact FTTH network distribution node equipment, offers quick and reliable connections, excellent protection, and efficient management for the FTTH network.
- Rated to IP20, suitable for indoor wall mount application.

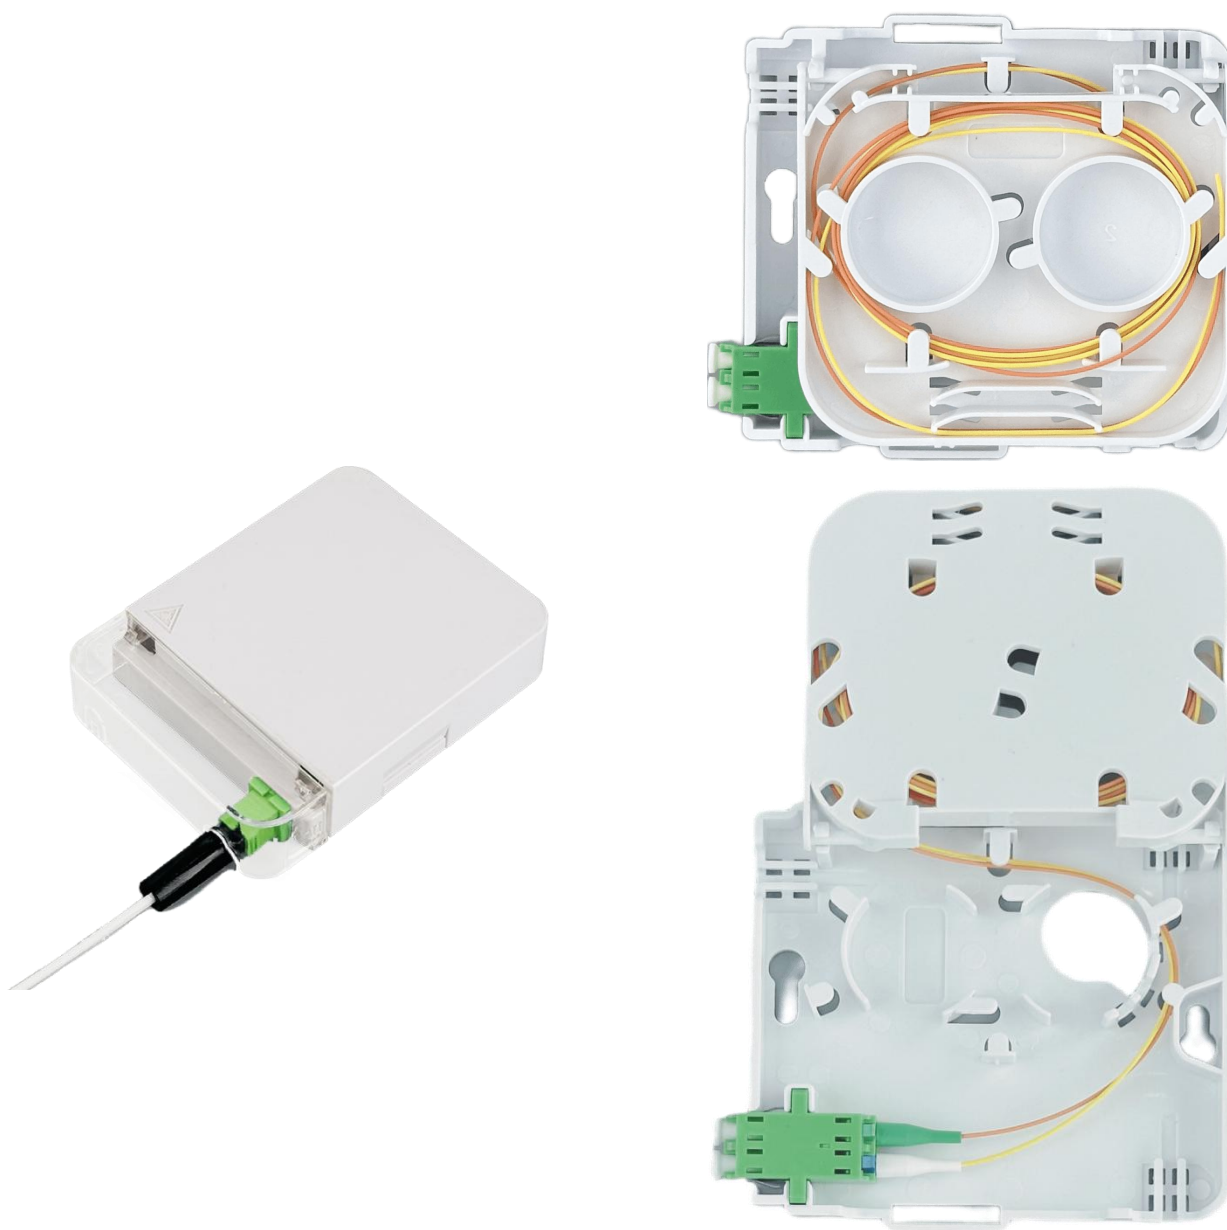




Features & Benefits

- Compact structure design, small but reasonable.
- Including a splice tray with up to 2 fusion splices.
- Material: ABS.
- IP Rating: IP20.
- Installation method: Wall mount.

Specifications

Part No.	GP-T868
Dimensions	115x86x23mm
Blind port	3
Outlet port	1 SC or LC Duplex
Splice capacity	2/4 FO
Splice tray	1 PC
Adapter (Max.)	1 SC or LC Duplex
Mount method	Wall-mounted

Accessories

Picture	Name	Size	Qty
	Wall-mounting Kit	-	2 Pairs
	Cable tie	3*100mm	3 PCS
	Splice sleeve	Ø1.2*45mm	2 PCS

Packing List

Part No.	Carton Size	PCS/CTN	G.W.
GP-T868	47x47x27CM	200	16KGS